


INSTALLATION INSTRUCTIONS

DWUR-15D-1A1C-CC3.6/ DWUR-20D-1A1C-CC3.6

Ultra High Speed Type A & Type C USB Charger with 15/20A Duplex Tamper Resistant Receptacle Interchangeable Face Cover

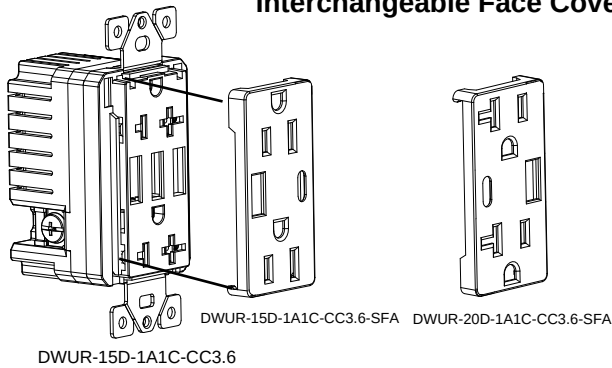

SPECIFICATION

Receptacle rating.....15/20 Amp, 125VAC
USB rating.....Two USB ports with total 3.6 Amp, 5VDC
Wire terminals.....#14-#12 AWG
Operating temperature..... 14 to 104°F (-10 to 40°C)
USB compatibility..... USB 1.1/2.0/3.0 devices, including Apple products
Strip length.....0.5 inch (back wire holes) , 1 inch (screw terminal)

FEATURES

- Industry's first USB type A and C charger combination
- Charge most compatible electronic device directly without an adapter
- USB type C is reversible, there is no up or down orientation, just plug it in
- Tamper-Resistant Shutters provide compliance with the 2011 NEC 406.11
- Replace a standard duplex receptacle
- Back and side wire for easy installation
- Interchangeable Color Face Cover

DESCRIPTION

The DWUR-15D/20D-1A1C-CC3.6 USB charger is our industry's first interchangeable face dual USB charger combine with type A and type C ports tamper resistant receptacle. Dual USB outputs let you charge any USB-C or USB-A device simultaneously. Special reversible USB C port enables you to insert it in either way easily, frees yourself from figuring out which side is correct when in darkness. From type C enabled laptops to large high-resolution type C enabled monitors, even some printers depending on the type C USB certified cables and compatible devices.

APPLICATION

- Cafeteria
- Offices
- Kitchens
- Bedrooms
- Restaurants
- Meeting Rooms
- Airport Lounges
- Labs
- Salons
- Hotels
- Schools
- Libraries
- Workstations

INSTALLATION

WARNING: To avoid fire, shock, or death. Turn off power at circuit breaker or fuse and test that power is off before wiring.

AVERTISSEMENT: Pour éviter un incendie, des chocs ou le décès, couper le courant au disjoncteur ou au fusible et vérifiez que l'alimentation est coupée avant de cabler.

To be installed and/or used in accordance with appropriate electrical codes and regulations.

Pour être installé et / ou utilisé conformément aux codes et aux règlements électriques appropriés.


If you are unsure or uncomfortable about performing the installation, please consult a qualified electrician.

Si vous n'êtes pas sûr ou mal à l'aise d'effectuer l'installation, vous à pouvez consulter un électricien qualifié.

This USB receptacle CANNOT be used if the outlet you are replacing has the top and bottom outlets controlled by separate circuit breaker.

1. For retrofit applications, remove wall plate and mounting screws.
2. Carefully pull out the existing receptacle from the wall box.
3. Unscrew all wires from each circuit conductor on device.
4. Connect wires per Wiring Diagram shown below.
5. Insert straight wires to each appropriate terminal and tighten screws firmly. Neutral to silver screw and Hot to brass screw.
6. Mount device into the wall box with screws provided and mount wall plate.
7. Restore power at the circuit breaker.
8. This device is to be installed in a wall box measuring at least 3" x 2" x 2 -1/2". And wired in accordance with NEC Article 314 box fill requirements.

Wiring Diagram

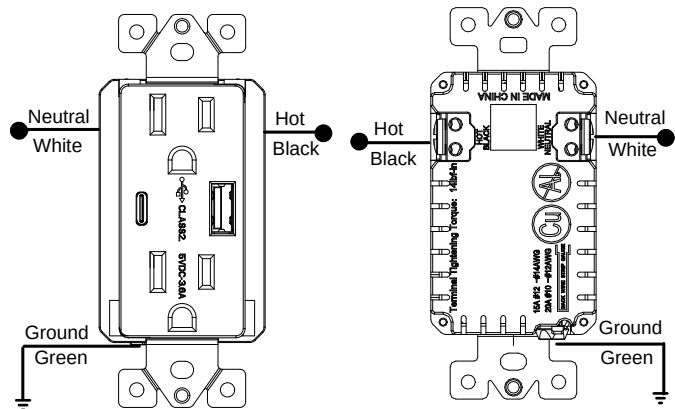

IMPORTANT SAFETY INSTRUCTIONS(SAVE THESE INSTRUCTION)

For Receptacle Model DWUR-15D-1A1C-CC3.6:

"WARNING - Use only replacement part (Model DWUR-15D-1A1C-CC3.6-SFA) with Receptacle (MTLC, Model DWUR-15D-1A1C-CC3.6)"

"Avertissement - n'utilisez que des pièces de rechange (Model DWUR-15D-1A1C-CC3.6-SFA) avec prise (MTLC, Model DWUR-15D-1A1C-CC3.6)"

For Receptacle Model DWUR-20D-1A1C-CC3.6:

"WARNING - Use only replacement part (Model DWUR-20D-1A1C-CC3.6-SFA) with Receptacle (MTLC, Model DWUR-20D-1A1C-CC3.6)"

"Avertissement - n'utilisez que des pièces de rechange (Model DWUR-20D-1A1C-CC3.6-SFA) avec prise (MTLC, Model DWUR-20D-1A1C-CC3.6)"

"WARNING - Risk of Fire or Electric Shock. Do not use this replacement part with any receptacle, other than the one specified on the replacement mark packaging and in these instructions."

Avertissement - risque d'incendie ou de choc électrique. Ne pas utiliser ce composant de remplacement avec d'autres réceptacles que ceux spécifiés dans l'emballage du panneau de remplacement et les réceptacles dans cette instruction

COMPATIBILITY

The High Speed Type A & Type C USB Charger/Tamper-Resistant Receptacle is compatible with a wide range of electronic devices including, but not limited to the following:


- iPad®
- iPad® Mini
- Tablets
- BlackBerry® Android Phones
- Windows® Phone by HTC
- Kindle™, Nook e-reader
- iPhone®
- iPod®
- Galaxy Tab™
- Bluetooth™ Headsets
- Digital Cameras
- Other USB compatible products

* 2015 Apple new MacBook with 12" Retina Display

* 2015 Google Chromebook Pixel

Type C USB charger delivers the maximum power available combine with your USB type C certified cable and enabled devices for charging and powering to reduce the time you are plugged in.

Safe charging: over-current, over-charging, short circuit protection will make the charge safely, without any risk of overcharging or damaging your devices.

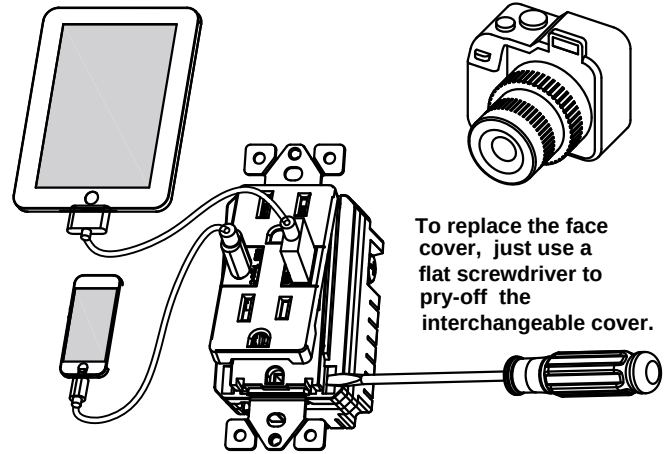

USB type C charger required type C certified cable and compatible devices to optimize charging time. The Different USB type C cables implementations may result in different charging times.

WARRANTY INFORMATION

Our company warranties this product to be free of defects in materials and workmanship for a period of two(2) years. There are no obligations or liabilities on the part of our company for consequential damages arising out of, or in connection with, the use or performance of this product or other indirect damages with respect to loss of property, revenue or profit, or cost of removal, installation or reinstallation.